

11/16/00
JC952 U.S. PTO

11-17-00

A

PATENT APPLICATION TRANSMITTAL LETTER

(Large Entity)

Docket No.

NORR0007US(12514RXUS02U)

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Transmitted herewith for filing under 35 U.S.C. 111 and 37 C.F.R. 1.53 is the patent application of:

Lewis T. Donzis, Earnest E. Hughes, Ryan M. Matelske, and Peter W. Baron

For: **DETECTING IF A SECURE LINK IS ALIVE**

JC639 U.S. PTO
09/714082

11/16/00

Enclosed are:

- ☒ Certificate of Mailing with Express Mail Mailing Label No. **EL669041235US**
- ☒ 7 sheets of drawings.
- ☐ A certified copy of a application.
- ☒ Declaration ☒ Signed. ☐ Unsigned.
- ☒ Power of Attorney
- ☐ Information Disclosure Statement
- ☐ Preliminary Amendment
- ☒ Other: **Recordation Form Cover Sheet and Assignment**

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	31	- 20 =	11	x \$18.00	\$198.00
Indep. Claims	5	- 3 =	2	x \$80.00	\$160.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$710.00
TOTAL FILING FEE					\$1,068.00

- ☒ A check in the amount of **\$1,068.00** to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **20-1504** as described below. A duplicate copy of this sheet is enclosed.
 - ☐ Charge the amount of as filing fee.
 - ☒ Credit any overpayment.
 - ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
 - ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated:

11/16/00



Signature

Dan C. Hu, Reg. No. 40,025
Trop, Pruner & Hu, P.C.
8554 Katy Freeway, Suite 100
Houston, TX 77024
(713) 468-8880 [Ph]
(713) 468-8883 [Fax]



21906

CC:

PATENT TRADEMARK OFFICE

APPLICATION
FOR
UNITED STATES LETTERS PATENT

TITLE: DETECTING IF A SECURE LINK IS ALIVE

INVENTOR: LEWIS T. DONZIS, EARNEST E. HUGHES,
RYAN M. MATELSKE, AND PETER W.
BARON

Express Mail No.: EL669041235US

Date: November 16, 2000

Prepared by: Trop, Pruner & Hu, P.C.
8554 Katy Freeway, Ste. 100, Houston, TX 77024
713/468-8880 [Office], 713/468-8883 [Fax]

DETECTING IF A SECURE LINK IS ALIVECROSS-REFERENCE TO RELATED APPLICATION

This application claims the benefit under 35 U.S.C. § 119(e) of U.S. Provisional Application Serial No. 60/201,443, entitled "Virtual Private Network Keep-Alive Mechanism," filed May 3, 2000.

TECHNICAL FIELD

This invention relates to detecting if a secure link between network nodes is alive.

BACKGROUND

Many types of communications are possible over data networks, including electronic mail, web browsing, file downloads, electronic commerce transactions, voice or other forms of real-time, interactive communications, and so forth. Networks include private networks, such as local area networks (LANs) or wide area networks (WANs), and public networks, such as the Internet. Private networks are networks in which access is restricted to authorized users, while public networks are generally accessible.

To prevent unauthorized access or interception of data communicated over data networks, various security protocols have been implemented to allow for encryption of data and authentication of sources of data. One such security protocol is the Internet Protocol Security (IPsec) protocol, which provides for secure communications over data networks.

One application of secure communications over data networks is to enable virtual private networks (VPNs). A VPN includes a public network as the primary transport medium, with communications protected by a security protocol. Access to a private network (such as a corporate LAN) from a remote location (such as from a branch office or by a remote user) is often desirable. Rather than using direct dial-up or dedicated point-to-point lines that are relatively expensive to maintain, a VPN between two endpoints (one endpoint being the LAN and the other endpoint being the remote terminal) can be established to provide secure communications over a public network.

By using a VPN, a secure, convenient, and cost-effective mechanism is provided for users who desire to remotely access a private network.

Although IPsec provides a robust security mechanism to protect communications between two endpoints, IPsec does not provide for a mechanism to determine if the link between the two endpoints is functioning properly. In other words, IPsec does not provide for a keep-alive mechanism. Thus, for example, nodes connected over a VPN may assume that the VPN connection is still valid even though the VPN may be down. As a result, reliable communications over the VPN may not be possible or may be delayed due to the time needed to re-establish a connection.

SUMMARY

In general, according to one embodiment, a method of determining if a link is alive comprises establishing a secure link between a first node and a second node according to a security protocol and sending at least one ping message to the second node over the secure link. The ping message is defined outside the security protocol. At least one ping reply is monitored for to determine if the secure link is alive.

In general, according to another embodiment, a method of communicating with a remote node comprises establishing a secure link between a first security gateway and a second security gateway, the remote node being in communication with the second security gateway. At least one ping message is sent to the remote node over the secure link and through the second security gateway. At least one ping reply from the remote node is monitored to determine if the secure link is alive.

Some embodiments of the invention may have one or more of the following advantages. A more reliable mechanism is provided to detect when a link protected by a security mechanism has failed, is down, or is otherwise unavailable. By identifying this unavailable condition, the link between the nodes may be terminated and re-established as necessary. Reliability of communications over a link protected by a security mechanism is improved.

Other or alternative features and advantages will become apparent from the following description, from the drawings, and from the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram of an embodiment of a communications system.

Fig. 2 is a block diagram of components in a router that is used in the communications system of Fig. 1, the router including a security gateway and a keep-alive module in accordance with some embodiments.

Fig. 3 is a message flow diagram of messages exchanged between, and acts performed by, first and second routers and a network node.

Fig. 4 illustrates a message according to an Internet Protocol Security (IPsec) protocol that can be exchanged between the first and second routers of Fig. 3.

Fig. 5 is a flow diagram of a process performed by one of the first and second routers of Fig. 3 in a first mode.

Fig. 6 is a flow diagram of a process performed by one of the first and second routers of Fig. 3 in a second mode.

Figs. 7A-7B illustrate example communications links between a router and an Internet service provider (ISP) system.

DETAILED DESCRIPTION

In the following description, numerous details are set forth to provide an understanding of the present invention. However, it will be understood by those skilled in the art that the present invention may be practiced without these details and that numerous variations or modifications from the described embodiments may be possible.

Referring to Fig. 1, a communications system 10 includes a data network 12 that is coupled to a first local network 14 and a second local network 16 through respective service provider systems 18 and 20 (including respective routers 34 and 36). In one arrangement, the data network 12 is a public network, such as the Internet. One protocol that can be employed for communications over the data network 12 is the Internet Protocol (IP). One version of IP is described in Request for Comments (RFC) 791, entitled "Internet Protocol," dated September 1981; and another version of IP is described in RFC 2460, entitled "Internet Protocol, Version 6 (IPv6) Specification," dated December 1998. In other embodiments, other packet-based protocols may be employed for communications over the data network 12.

The local network 14 includes a router 22 that is connected to a local area network (LAN) 24. The LAN 24 is tied to a number of nodes 26. In one arrangement, the LAN 24 is an Ethernet network as defined by the Institute of Electrical and Electronic Engineers (IEEE) 802.3 Standard. In other embodiments, the LAN 24 may be a wireless LAN. Alternatively, instead of a LAN, the nodes 26 may be coupled over a wide area network (WAN) to the router 22.

The other local network 16 similarly includes a router 28, a LAN or WAN 30, and nodes 32 coupled to the LAN or WAN 30. Examples of nodes 26 and 32 include computer systems, network telephones, Internet appliances, and other devices or systems. In one example arrangement, the local network 16 is the main office network while the local network 14 is the branch office network. In another example arrangement, instead of the local network 14, a remote user system (such as one associated with a traveling user or a home user) is able to access the ISP system 18 directly through a dial-up connection. If access of the data network 12 from one of the nodes 26 or 32 is requested, the respective router 22 or 28 establishes a connection with a respective service provider system 18 or 20. Once a connection between the router 22 or 28 and respective service provider system 18 or 20 is established, the node 26 or 32 is able to communicate over the data network 12. Examples of such communications include electronic mail, web browsing, file downloads, text chat sessions, voice or other real-time, interactive communications, and so forth.

For secure communications between the local networks 14 and 16, a virtual private network (VPN) can be established over the data network 12. The transport medium of the VPN is a public network such as the data network 12, with a security protocol employed to protect communications between endpoints of the VPN. In the illustrated example, the security endpoints are the routers 22 and 28, which include respective security gateways 38 and 40. In the arrangement where a remote user system is connected directly to the ISP system (without going through a router), the security gateway is implemented in the remote user system.

Thus, a "link" protected by a security mechanism can be established between the nodes containing security gateways. As used here, a "link" refers to one or more communications channels between two nodes. Such communications channels can be

interconnected by routers, bridges, or other devices. A link protected by a security mechanism can also be referred to as a “secure link.”

In one embodiment, the security gateways 38 and 40 implement the Internet Protocol Security (IPsec) protocol, described in part by RFC 2401, entitled “Security Architecture for the Internet Protocol,” dated November 1998. Under IPsec, an Internet Security Association and Key Management Protocol (ISAKMP) defines procedures and packet formats to establish, negotiate, and provide security services between network entities. Once the desired security services have been negotiated between two entities, such as the security gateways 38 and 40, traffic is carried in IP Encapsulating Security Payload (ESP) packets. In another arrangement, security services are negotiated between a remote user system and the router 28. During a secure communications session, transmitted data is encrypted and authentication of endpoints in the session is performed. ISAKMP is described in RFC 2408, entitled “Internet Security Association and Key Management Protocol (ISAKMP),” dated November 1998; and ESP is described in RFC 2406, entitled “IP Encapsulating Security Payload (ESP),” dated November 1998. In other embodiments, other types of security protocols may be employed for establishing secure communications over the data network 12.

Under IPsec, encryption and authentication algorithms are determined based on a security association (SA) of an IP packet. An SA indicates the types of security services that are associated with the IP packet. An SA is defined by the destination address carried in the IP packet as well as a security parameters index (SPI) of an ESP message (in which an IP packet is embedded).

To establish a secure communications session or secure link between two nodes, the two nodes perform IPsec negotiation. IPsec negotiation involves the establishment of an SA. ISAKMP provides the protocol exchanges to establish an SA between negotiating entities, with the IPsec negotiation specifying the authentication method and key exchange to be used as part of the ISAKMP protocol. The established SA specifies the relationship between the two nodes (or more than two nodes) that describe how the nodes will use security services to communicate securely over the secure link. After the SA has been determined, a secure link (such as a VPN session) is established.

IPsec, however, does not provide for a keep-alive mechanism that enables two security gateways to determine if a secure link between the endpoints is alive. This may occur when a router (22 or 28) containing one of the security gateways reboots or experiences a crash or fault condition. In the example arrangement of Fig. 1, when a router reboots, it has to re-establish a connection with the respective service provider system (18 or 20). In re-establishing the connection, the router may be assigned a new address (e.g., IP address). This may occur if the respective service provider system implements either a DHCP (Dynamic Host Configuration Protocol) or IPCP (Internet Protocol Control Protocol) mechanism, which enables dynamic assignment of IP addresses. DHCP is described in RFC 1541, entitled “Dynamic Host Configuration Protocol,” dated October 1993; and IPCP is described in RFC 1332, entitled “The PPP Internet Protocol Control Protocol (IPCP),” dated May 1992.

Since an SA is based in part on the IP addresses of the routers 22 and 28, a change in IP addresses of one of the routers will render the SA invalid. If the SA becomes invalid, then the secure link is no longer “alive” or valid. Under IPsec, a security gateway may be unaware of the invalid status of the secure link, which makes communications over the secure link unreliable. An IPsec SA expires after a predetermined period of time (e.g., eight hours). After expiration of the security association, automatic recovery of the link can occur. However, the time needed for such automatic recovery is usually unacceptably large.

In accordance with some embodiments of the invention, a keep-alive mechanism is implemented in each of the nodes (e.g., routers 22 and 28) coupled by a secure link protected by a security mechanism to enable the nodes to determine if the link is alive. Since IPsec does not provide for a keep-alive mechanism, a keep-alive mechanism defined outside of the IPsec protocol is employed.

A keep-alive mechanism according to some embodiments employs “ping” messages sent by one of the nodes coupled to the secure link to the peer node. To validate the secure link, the ping messages are sent over secure link (that is, the ping messages are sent through the tunnel established by the secure link). Thus, the ping messages themselves are encrypted according to the SA established for the secure link and carried in the payload of IP packets for communication to the peer node.

Whether the secure link is alive (e.g., whether an IPsec SA is valid) is determined based on responses to the ping messages. In one embodiment, a ping message can be according to the Internet Control Message Protocol (ICMP), as described in RFC 792, entitled “Internet Control Message Protocol,” dated September 1981. The ping message may be an ICMP echo message. An ICMP echo message specifies the source address (the address of the node sending the echo message) and the destination address (the address of the target node). In response to an ICMP echo message, the receiving node returns an ICMP reply message, in which the source and destination addresses are switched. The echo message also carries data, which is returned in the echo reply message. To enable matching of an echo reply message to an echo message, identifier and sequence fields are contained in the messages. Thus, in this embodiment, one or more ICMP echo messages are transmitted periodically by a router to a destination over a secure link. If the link is alive, then the destination returns ICMP echo reply messages.

In other embodiments, other types of ping messages can be communicated over the data network 12 to determine if a link is alive. Thus, generally, on a secure link between two nodes that is protected by a security protocol, one or more ping messages may be communicated over the secure link to determine if the link is alive, with the ping messages defined outside the security protocol. For example, if the security protocol is IPsec, then the ping messages defined outside IPsec include ICMP messages. Thus, a benefit offered by some embodiments of the invention is the ability to implement a keep-alive mechanism in a secure link protected by a security protocol that does not provide for a mechanism to determine if a link is alive.

In another aspect of the invention, by using certain types of ping messages, such as ICMP messages, the ping messages can be targeted at nodes that are behind a security gateway. Thus, in the communications system of Fig. 1, instead of just being able to determine if a link between two peer nodes containing security gateways is alive, mechanisms according to some embodiments are able to determine if the link between a first security gateway and a node coupled behind a second security gateway is alive. As used here, a node is said to be “behind” a security gateway if communications between the node and an external device has to go through the security gateway. Thus, in the example of Fig. 1, the first router 22 can send ping messages through the data network 12

and the security gateway 40 to one of the nodes 32. In response to the ping messages, the node 32 returns a ping reply through the router 28 and data network 12 to the first router 22.

In the illustrated arrangement, an optional secondary communications mechanism 42 is also provided between the routers 22 and 28 as a redundant path if the primary path through the data network 12 becomes unavailable. Thus, for example, if the keep-alive mechanism according to some embodiments detects that a secure link is down, the secondary communications mechanism 42 can be used for communications between the routers 22 and 28. In one embodiment, the secondary communications mechanism 42 includes a WAN.

Referring to Fig. 2, components of the router 22 or 28 in one example arrangement are illustrated. The router 22 or 28 includes a local network interface 102 that provides an interface to LAN 24 or 30. In one embodiment, the local network interface 102 includes Ethernet functions to enable communications over an Ethernet network. Inbound and outbound messages are passed through the local network interface 102 as well as an IP layer 104 and a Transmission Control Protocol (TCP) layer 106. TCP is a transport layer that manages connections over an IP networks, and is described in RFC 793, entitled "Transmission Control Protocol," dated September 1981.

A router module 108 provides routing tasks for messages communicated between the LAN 24 or 30 and an external network 110 coupled through an external network interface 112. The external network 110 is the network or link to an access system (shown in Figs. 7A and 7B) that couples the router 22 or 28 to the ISP system. Inbound and outbound messages associated with the external network 110 are passed through the network interface 112, a point-to-point (PPP) layer 114, an IP layer 116, and a layer 118 that includes TCP, UDP (User Datagram Protocol), ESP, and ISAKMP functions. UDP is another type of transport layer, and is described in RFC 768, entitled "User Datagram Protocol," dated August 1980. PPP, as described in RFC 1661, entitled "The Point-to-Point Protocol (PPP)," dated July 1994, provides a standard method for transporting multi-protocol packets over point-to-point connections. In this case, the point-to-point connection is between the router 22 or 28 and the access system that provides the access to the router 34 or 36 in the ISP system 18 or 20. In other embodiments, the PPP layer

114 can be omitted if point-to-point connections are not used. The layers 112, 114, 116, and 118 are part of a protocol stack.

The router module 108 can be a software module that is executable on a control unit 120 connected to a storage unit 122. Alternatively, the router module 108 can be a hardware component, such as one implemented as a programmable gate array (PGA), application-specific integrated circuit (ASIC), microcontroller, or other type of hardware control component.

The router 22 or 28 also includes the security gateway module 38 or 40 for establishing secure sessions, such as IPsec sessions. The security gateway module 38 or 40 can be a software module executable on the control unit 120, or alternatively, the security gateway module 38 or 40 can be implemented in hardware. Another module in the router 22 or 28 is a keep-alive module 130 capable of sending ping messages through the protocol stack to the external network 110 and over the data network 12 (Fig. 1). The security gateway module 38 or 40 and the keep-alive module 130 can be implemented within a single module or as separate modules (as shown).

Referring to Fig. 3, a node 32 (that is part of the local network 16) sends a request to the router 28 for access to the data network 12. In response, the security gateway 40 in the router 28 performs an IPsec negotiation (at 204) with the remote security gateway 38 in the router 22. When the negotiation is complete, a secure link is established (at 206) between the security gateways 38 and 40. The secure link is associated with an SA.

As shown in Fig. 4, an example message that is exchanged in the secure communications session is illustrated. Fig. 7 shows an IP packet 300 that includes an IP header 302, an ESP header 304, and a protected payload section 306. The protected payload section 306 contains the original IP header, TCP or UDP port numbers, and the data payload. The IP header 302 includes a source address, a destination address, and a protocol identifier to indicate the next level protocol that is used (e.g., TCP, UDP, or ESP). The payload section 306 is protected by encryption. In other embodiments, other formats for IP packets protected by a security protocol may be employed.

Referring again to Fig. 3, in accordance with some embodiments of the invention, the keep-alive module 30 in the router 22 sends periodic ping messages (at 208) to the peer router 28. Ping messages can also be sent in the other direction, from the keep-alive

module 130 in the router 28 to the router 22. Each ping message is carried in the encrypted payload section 306 of the IP packet 300 (Fig. 4).

As indicated in Fig. 3, the ping message can be sent N times, with N being greater than or equal to one. With each ping message, the keep-alive module 130 in the router 22 monitors for a ping reply that is sent (at 210). Each keep-alive module 130 can be associated with three parameters: a ping interval parameter to indicate the frequency at which ping messages are periodically sent; a timeout parameter to indicate how long to wait for a reply to each ping message; and a number of failures parameter to indicate how many non-responses to ping messages can be tolerated before a secure link is indicated as being down.

Alternatively, or in addition to the ping message sent at 208, the keep-alive module 130 in the router 22 can also send ping messages (at 212) to the node 32, which sits behind the security gateway 40 in the router 28. Thus, in accordance with some embodiments, the keep-alive module 130 has flexibility in the target that the keep-alive module 130 pings. The keep-alive module 130 in the router 22 then monitors (at 214) for a ping reply from the node 32.

The keep-alive module 130 in the router 22 detects (at 216) if one or more ping replies were received from the target network element. If no ping reply was received, or if there were greater than a predetermined number of non-responses, then the keep-alive module 130 indicates to the corresponding security gateway 38 (at 218) that the secure link between the routers 22 and 28 is down. If the secure link is down, the security gateway 38 then tears down (at 220) the secure link between the security gateways 38 and 40 by destroying the SA of the secure link. If desired, the secure link can then be re-established by performing another IPsec negotiating to derive a new SA.

Referring to Figs. 5 and 6, the keep-alive module 130 can be in one of two different modes: monitor mode and control mode. Monitor mode can be used for connections between the router 22 or 28 and an access system that are not permanent in nature, such as an analog dial-up connection or an Integrated Services Digital Network (ISDN) dial-up connection. In such connections, tariffs imposed by the local exchange carrier may discourage maintaining permanent connections between the router 22 or 28 and the associated service provider 18 or 20 through the access system. On the other

hand, where permanent connections between the router 22 or 28 and the service provider through the access system is available, such as when an xDSL (digital subscriber line) or cable modem is employed, then the keep-alive module 130 may be set in the control mode, which is designed to maintain permanent connections if possible.

Referring to Fig. 5, an example of operations performed in monitor mode is shown. The keep-alive module 130 in the router (22 or 28) first determines if it is time to send a ping message (at 402). Next, the router determines if a connection to the respective service provider system is active (at 404). In a dial-up or other demand connection environment, a timeout mechanism may be employed in the router to deactivate the link after a certain period of inactivity.

If the connection is determined (at 406) to be not active, then a ping message is not sent (at 408) to avoid establishing a connection. However, if the connection is active, a ping message (or plural ping messages) are sent (at 410). However, the one or more ping messages are not considered by the timeout mechanism in the router as being activity, so that the timeout mechanism is not reset in response to communication of a ping message (412). Based on responses (or lack thereof) to the transmitted one or more ping messages, the router determines (at 414) if the secure link is down.

Referring to Fig. 6, an example operation in the control mode is illustrated. The keep-alive module 130 in the router first determines if it is time to send a ping message (at 502). If so, the ping message (or multiple ping messages) are sent (at 504). The keep-alive module 130 in the router then determines (at 506) if a reply has been received. If a reply is not received, or if greater than a predetermined number of non-responses have been detected, then the secure link is brought down (at 508). The router also determines (at 510) whether to switch to a secondary link, such as a link through the secondary communications mechanism 42 (Fig. 1). If switching to the secondary link is desired, then a link is established (at 512) over the secondary communications mechanism. However, if switching to the secondary communications mechanism 42 is not to be performed, then the router can attempt to re-establish (at 514) the secure link over the primary path (which includes the data network 12).

Before re-establishing the secure link over the data network 12, the router continues to send ping messages. Thus, even if a connection is considered down for

normal traffic, communication of ping messages can still be attempted. If a successful ping reply is received, then the security association between the two peer security gateways can be established again to provide for a secure link. By first checking to ensure that a connection is active before establishing a new secure link, unnecessary attempts of performing IPsec negotiations can be avoided.

Referring to Figs. 7A and 7B, some example embodiments of the connections between the router 22 or 28 and the service provider system 18 or 20 are illustrated. In the Fig. 7A embodiment, a bridge 602 is connected to the router 22 or 28 over a channel 604. The channel 604 may be an Ethernet channel in one example. The bridge 602 translates data on the link 604 to a format of another channel 206 that is connected to the other side of the bridge 602. Examples of the channel 606 include an xDSL, channel, an ISDN channel, an analog dial-up channel, or another type of channel. The channel 606 is coupled to central office equipment 608 provided by a local exchange carrier (LEC), which is usually a telephone company. The central office equipment 608 is in turn coupled to the service provider system 18 or 20. Alternatively, the service provider system 18 or 20 may be part of the central office 608. In the Fig. 3A embodiment, the access system includes the bridge 602 and the central office equipment 608.

In Fig. 7B, another arrangement is shown in which a channel 610 between the router 22 or 28 and central office equipment 212 (the access system) is an Ethernet channel. In this embodiment, a bridge is not needed between the router and the central office equipment 612. In either the Fig. 7A or 7B embodiment, a point-to-point connection is established between the router and the central office equipment.

Instructions of the various software routines or modules discussed herein may be stored on one or more storage units in the corresponding nodes and loaded for execution on corresponding control units. The control units include microprocessors, microcontrollers, processor cards (including one or more microprocessors or microcontrollers), or other control or computing devices. As used here, a “controller” refers to hardware, software, or a combination thereof. A “controller” can be made up of one component or plural components.

The storage units include one or more machine-readable storage media for storing data and instructions. The storage media include different forms of memory including

semiconductor memory devices such as dynamic or static random access memories (DRAMs or SRAMs), erasable and programmable read-only memories (EPROMs), electrically erasable and programmable read-only memories (EEPROMs), and flash memories; magnetic disks such as fixed, floppy and removable disks; other magnetic media including tape; and optical media such as compact disks (CDs) or digital video disks (DVDs). Instructions that make up the various software routines or modules in a node and stored in a respective storage unit when executed by a control unit cause the corresponding node to perform programmed acts.

The instructions of the software routines or modules are loaded or transported into the node in one of many different ways. For example, code segments including instructions stored on floppy disks, CD or DVD media, a hard disk, or transported through a network interface card, modem, or other interface device may be loaded into the node and executed as corresponding software routines or modules. In the loading or transport process, data signals that are embodied in carrier waves (transmitted over telephone lines, network lines, wireless links, cables, and the like) may communicate the code segments, including instructions, to the node. Such carrier waves are in the form of electrical, optical, acoustical, electromagnetic, or other types of signals.

While the invention has been disclosed with respect to a limited number of embodiments, those skilled in the art will appreciate numerous modifications and variations therefrom. It is intended that the appended claims cover such modifications and variations as fall within the true spirit and scope of the invention.

What is claimed is:

- 1 1. A method of determining if a link is alive, comprising:
2 establishing a secure link between a first node and a second node
3 according to a security protocol;
4 sending at least one ping message targeting the second node over the
5 secure link, the at least one ping message defined outside the security protocol; and
6 monitoring for at least one ping reply to determine if the secure link is
7 alive.

- 1 2. The method of claim 1, wherein establishing the secure link comprises
2 establishing a virtual private network session.

- 1 3. The method of claim 1, wherein establishing the secure link comprises
2 establishing a link protected by an Internet Protocol Security protocol.

- 1 4. The method of claim 3, wherein sending the at least one ping message
2 comprises sending at least one Internet Control Message Protocol message.

- 1 5. The method of claim 1, wherein sending the at least one ping message
2 comprises sending at least one Internet Control Message Protocol message.

- 1 6. The method of claim 1, wherein establishing the secure link comprises
2 establishing the secure link between first and second nodes each comprising a security
3 gateway.

- 1 7. The method of claim 6, further comprising sending at least one ping
2 message targeting another node behind the second node.

- 1 8. The method of claim 7, further comprising monitoring for at least one ping
2 reply form the other node.

1 9. The method of claim 1, further comprising tearing down the secure link if
2 the secure link is determined not to be alive.

1 10. The method of claim 9, wherein tearing down the secure link comprises
2 tearing down a security association according to an Internet Protocol Security protocol.

1 11. A method of communicating with a remote node, comprising:
2 establishing a secure link between a first security gateway and a second
3 security gateway, the remote node in communication with the second security gateway;
4 sending at least one ping message to the remote node over the secure link
5 and through the second security gateway; and
6 monitoring for at least one ping reply from the remote node to determine if
7 the secure link is alive.

1 12. The method of claim 11, wherein establishing the secure link comprises
2 establishing a secure link protected according to an Internet Protocol Security protocol.

1 13. The method of claim 11, wherein establishing the secure link comprises
2 establishing a virtual private network session.

1 14. The method of claim 11, wherein establishing the secure link comprises
2 establishing a secure link protected according to a security protocol.

1 15. The method of claim 14, wherein sending the at least one ping message
2 comprises sending at least one ping message defined outside the security protocol.

1 16. The method of claim 15, wherein sending the at least one ping message
2 comprises sending an Internet Control Message Protocol message.

1 17. The method of claim 16, wherein establishing the secure link comprises
2 establishing a secure link protected according to an Internet Protocol Security protocol.

1 18. A system for communicating between a network element and a remote
2 node, comprising:
3 a security module adapted to establish a secure link with the remote node,
4 the secure link having a security mechanism according to a security protocol; and
5 a keep-alive module adapted to send at least one ping message over the
6 secure link to the remote node, the at least one ping message defined outside the security
7 protocol.

1 19. The system of claim 18, wherein the security protocol comprises an
2 Internet Protocol Security protocol.

1 20. The system of claim 18, wherein the at least one ping message comprises
2 an Internet Control Message Protocol message.

1 21. The system of claim 18, further comprising:
2 an interface to a packet-based network, the secure link established over the
3 packet-based network; and
4 a layer to control communications over the packet-based network.

1 22. The system of claim 21, wherein the layer comprises an Internet Protocol
2 layer.

1 23. The system of claim 18, wherein the keep-alive module is adapted to
2 further monitor for at least one ping reply responsive to the at least one ping message to
3 determine if the secure link is alive.

1 24. The system of claim 23, wherein the security module is adapted to tear
2 down a security association of the secure link if the secure link is not alive.

1 25. The system of claim 24, wherein the security association comprises an
2 Internet Protocol Security protocol security association.

1 26. The system of claim 18, wherein the keep-alive module is adapted to
2 further monitor for at least one ping reply responsive to the at least one ping message to
3 determine if the secure link is alive, the system further comprising a module adapted to
4 establish a link over a secondary communication network if the secure link is not alive.

1 27. An article comprising at least one storage medium containing instructions
2 for controlling communications, the instructions when executed causing a controller to:
3 establish a secure link between a first node and a second node according to
4 a security protocol;
5 send at least one ping message targeting the second node over the secure
6 link, the at least one ping message defined outside the security protocol; and
7 monitor for at least one ping reply to determine if the secure link is alive.

1 28. The article of claim 27, wherein the instructions when executed cause the
2 controller to further establish an Internet Protocol security association for the secure link.

1 29. The article of claim 28, wherein the instructions when executed cause the
2 controller to tear down the security association if the controller does not receive the at
3 least one ping reply.

1 30. The article of claim 27, wherein the controller is part of the first node.

1 31. A data signal embodied in a carrier wave and containing instructions for
2 controlling communications, the instructions when executed causing a system to:
3 establish a secure link between a first gateway and a second gateway;
4 send at least one ping message to a remote node over the secure link and
5 through the second security gateway; and
6 monitor for at least one ping reply from the remote node to determine if
7 the secure link is alive.

ABSTRACT OF THE DISCLOSURE

A communication system includes a data network that is coupled to various nodes, including routers. In one example arrangement, a first router is part of a first local network and a second router is part of a second local network. Each router includes a security gateway module and a keep-alive module. The security gateway module is capable of establishing a secure link, such as one according to an Internet Protocol Security (IPsec) protocol, over the data network. The keep-alive module sends one or more ping messages over the secure link to the remote router (or a node coupled to the router), which responds with appropriate ping replies to indicate that a link is alive.

5

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

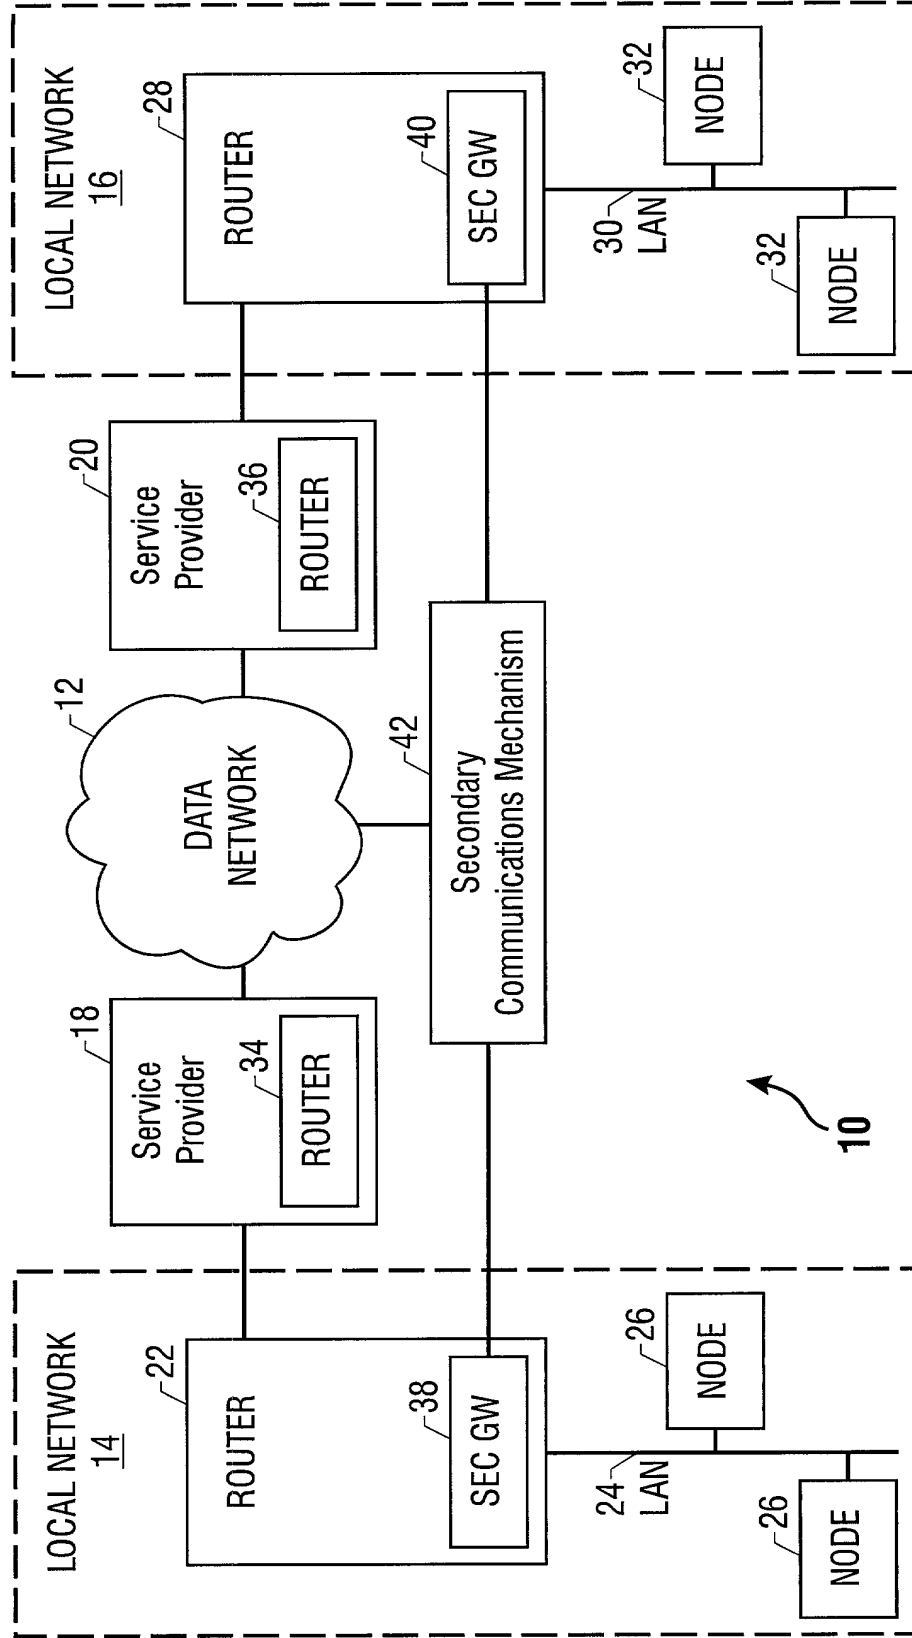


FIG. 1

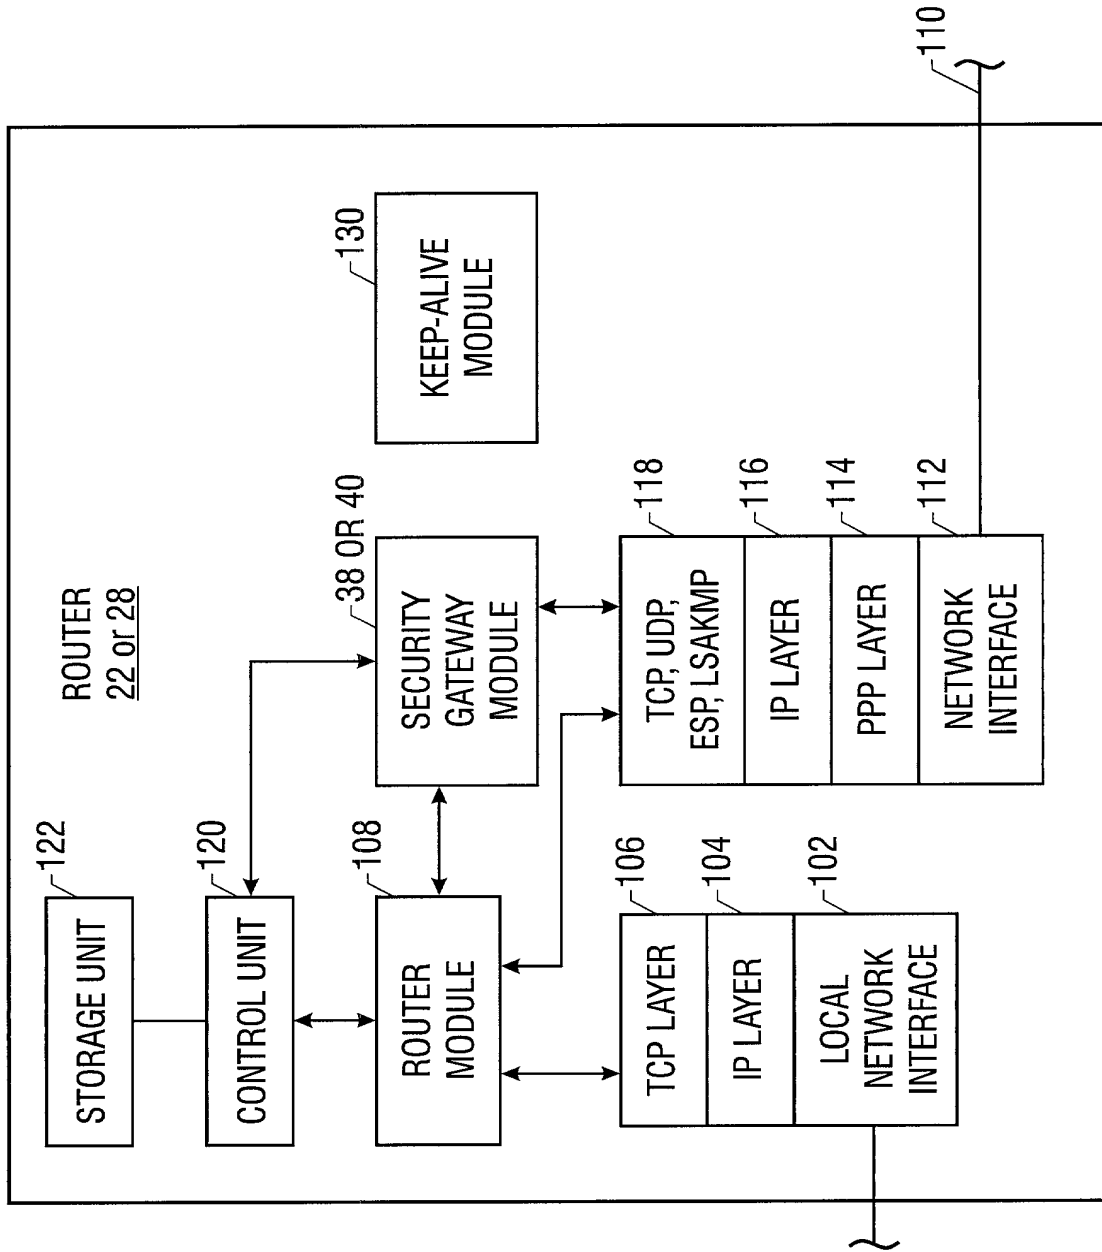


FIG. 2

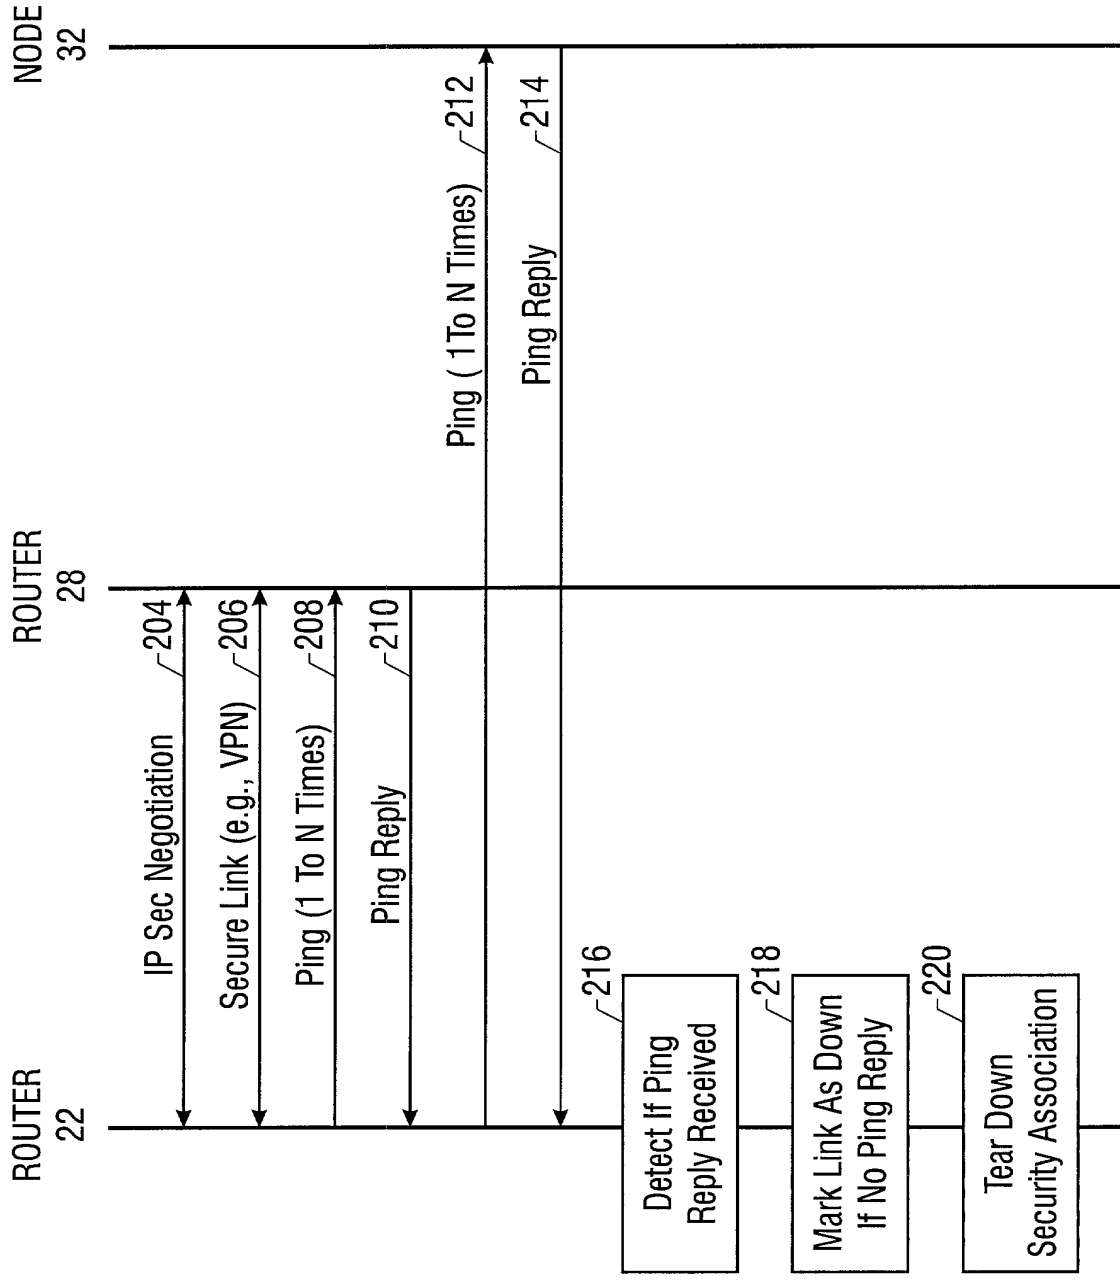


FIG. 3

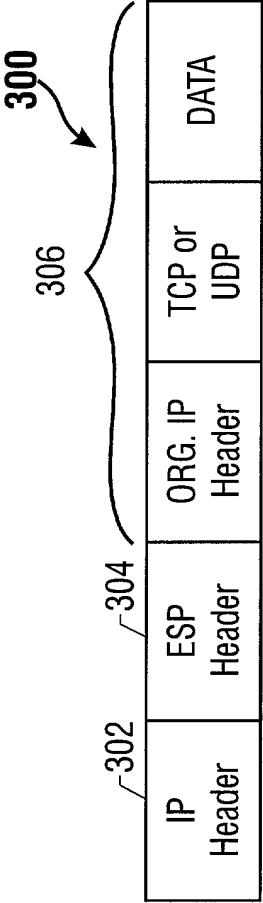


FIG. 4

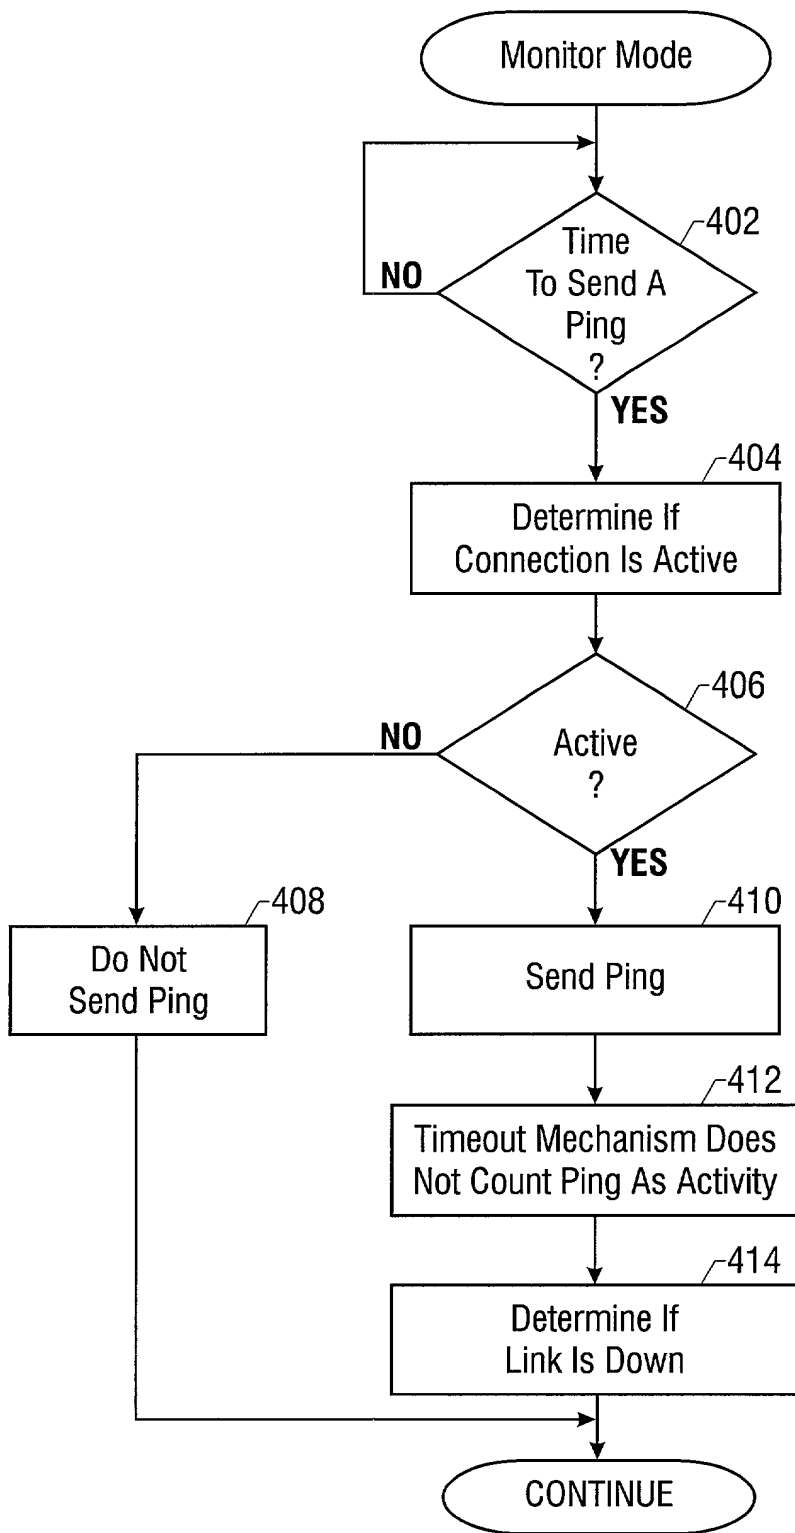


FIG. 5

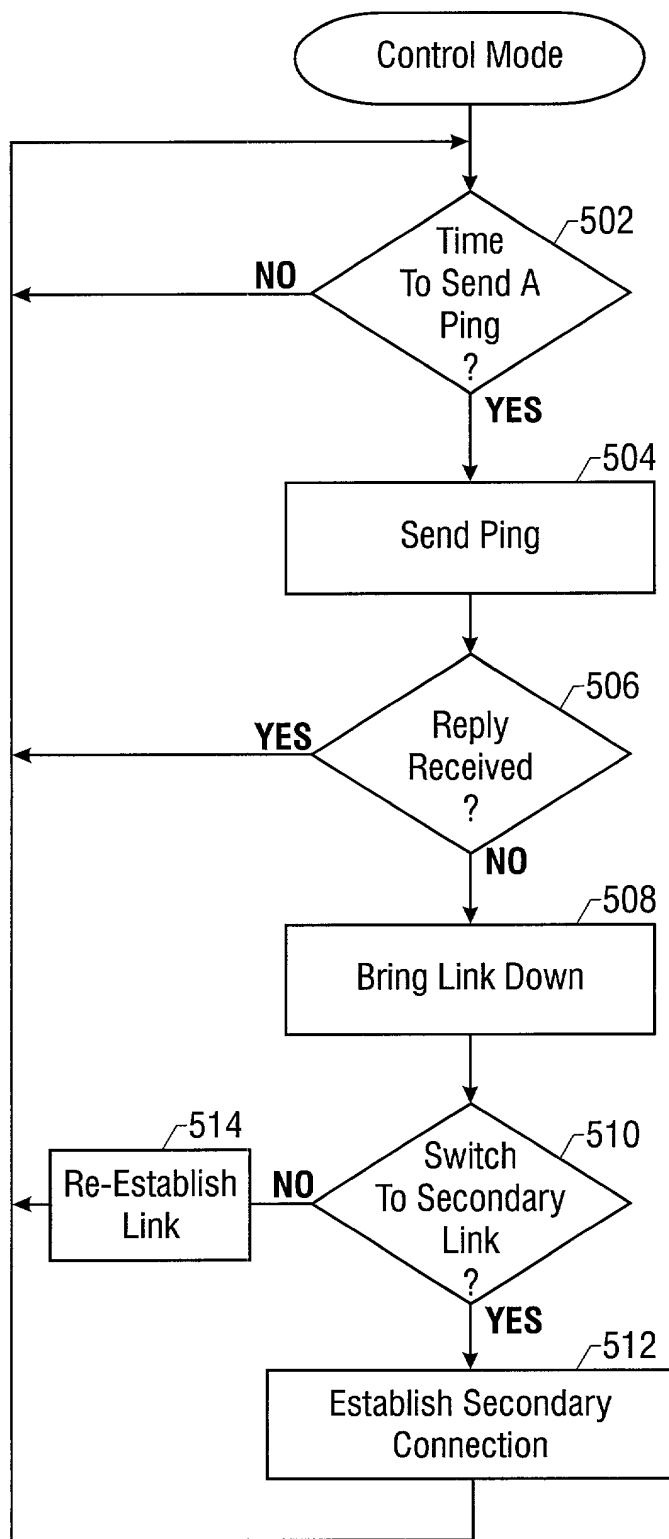


FIG. 6

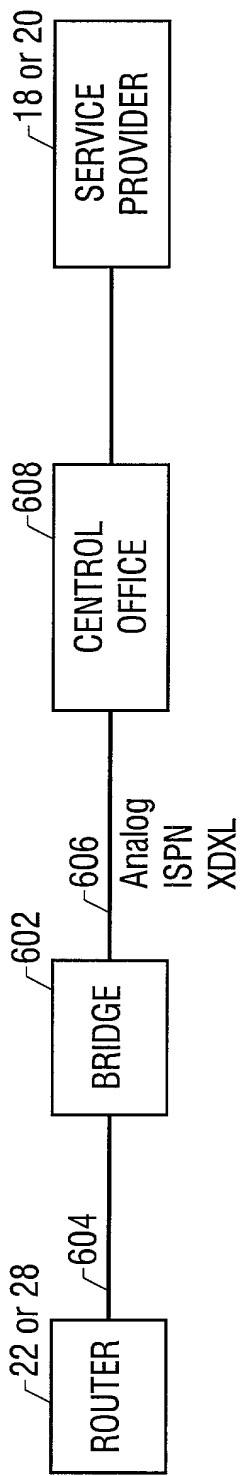


FIG. 7A

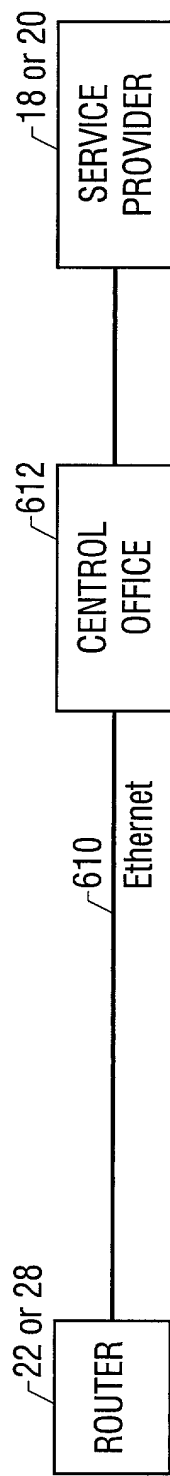


FIG. 7B

Attorney's Docket No.: NORR-0007-US (12514RXUS02U)

PATENT

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name.

I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

DETECTING IF A SECURE LINK IS ALIVE

the specification of which

<input checked="" type="checkbox"/>	is attached hereto.
<input type="checkbox"/>	was filed on _____ as
<input type="checkbox"/>	United States Application Number _____
<input type="checkbox"/>	or PCT International Application Number _____
<input type="checkbox"/>	and was amended on _____
	(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above. I do not know and do not believe that the claimed invention was ever known or used in the United States of America before my invention thereof, or patented or described in any printed publication in any country before my invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, and that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months (for a utility patent application) or six months (for a design patent application) prior to this application.

I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d), of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>Prior Foreign Application(s):</u>			<u>Priority Claimed</u>	
<u>Number</u>	<u>(Country)</u>	<u>(Day/Month/Year Filed)</u>	<u>Yes</u>	<u>No</u>
<u>Number</u>	<u>(Country)</u>	<u>(Day/Month/Year Filed)</u>	<u>Yes</u>	<u>No</u>

I hereby claim the benefit under title 35, United States Code, Section 119(e) of the United States provisional application(s) listed below:

<u>60/201,443</u>	<u>May 3, 2000</u>
(Application Number)	(Filing Date)
(Application Number)	(Filing Date)





I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

<u>(Application Number)</u>	<u>Filing Date</u>	<u>(Status-patented, pending, abandoned)</u>
-----------------------------	--------------------	--

I hereby appoint Timothy N. Trop, Reg. No. 28,994; Fred G. Pruner, Jr., Reg. No. 40,779, Dan C. Hu, Reg. No. 40,025 and Ruben S. Bains, Reg. No. 46,532; my patent attorneys, of TROP, PRUNER & HU, P.C., with offices located at 8554 Katy Freeway, Ste. 100, Houston, TX 77024, telephone (713) 468-8880, and John D. Crane, Reg. No. 25,231; Howard R. Greenberg, Reg. No. 26,171; W. Glen Johnson, Reg. No. 39,525; Randall Mishler, Reg. No. 42,006; Kevin L. Smith, Reg. No. 38,620; Vernon E. Williams, Reg. No. 38,713; Thomas A. Gigliotti, Reg. No. 37,579; Eric P. Jensen, Reg. No. 37,647; J. Erik Fako, Reg. No. 42,522; John H. Vynalek, Reg. No. 37,254; John R. Witcher, III, Reg. No. 39,877; and R. Todd Morgan, Reg. No. 43,815, my patent attorneys, of Nortel Networks Limited; with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith.

Send correspondence to Dan C. Hu, TROP, PRUNER & HU, P.C., 8554 Katy Freeway, Ste. 100, Houston, TX 77024 and direct telephone calls to Dan C. Hu, (713) 468-8880.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

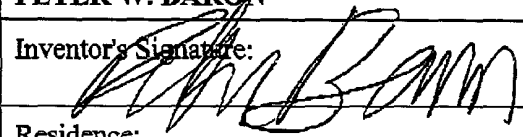Full Name of Sole/First Inventor: LEWIS T. DONZIS	
Inventor's Signature: 	Date: 11/15/00
Residence: 13 ASPEN CREEK, SAN ANTONIO, TX 78248	Citizenship: U.S.A.
Post Office Address: 13 ASPEN CREEK, SAN ANTONIO, TX 78248	
Full Name of Second/Joint Inventor: EARNEST E. HUGHES	
Inventor's Signature: 	Date: 11/15/00
Residence: 21 HIGHGATE DRIVE, SAN ANTONIO, TX 78257	Citizenship: U.S.A.
Post Office Address: 21 HIGHGATE DRIVE, SAN ANTONIO, TX 78257	
Full Name of Third/Joint Inventor: RYAN M. MATELSKE	
Inventor's Signature: 	Date: 11/16/00
Residence: 7511 UTSA DRIVE, SAN ANTONIO, TX 78249	Citizenship: U.S.A.
Post Office Address: 7511 UTSA DRIVE, SAN ANTONIO, TX 78249	
Full Name of Third/Joint Inventor: PETER W. BARON	
Inventor's Signature: 	Date: 11/15/00
Residence: 9703 DOVE SHADOW, SAN ANTONIO, TX 78230	Citizenship: U.S.A.
Post Office Address: 9703 DOVE SHADOW, SAN ANTONIO, TX 78230	

NORR-0007-US